"B" Tubing Anchor Packer

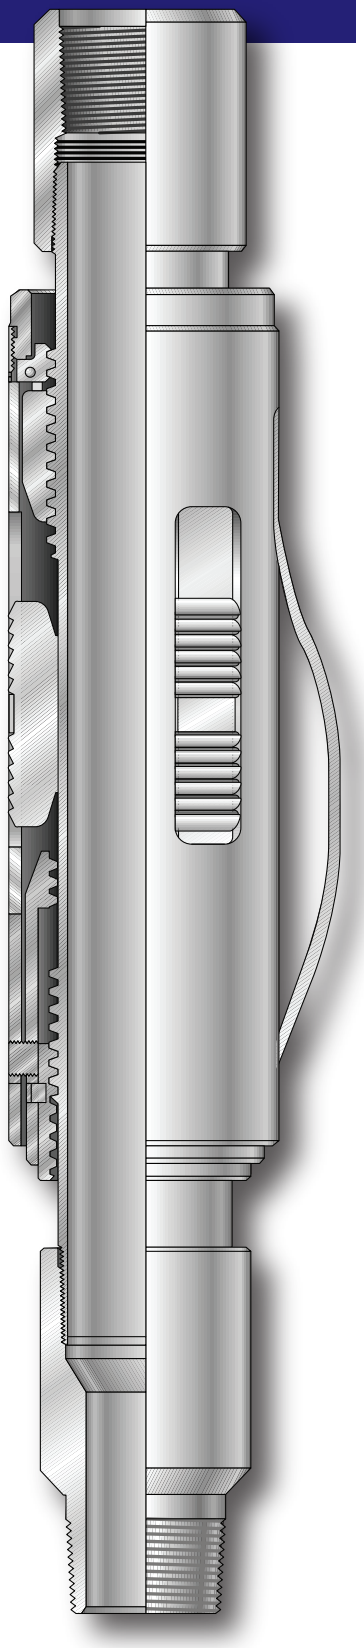

The "B" acts as a tubing anchor to maintain tension in the tubing string and as a tubing catcher to prevent parted pipe from falling to the bottom of the well.

Applications

- Most rod pumping applications where it is important to maintain tension in the tubing.

Features

- Rotate left to set, right to release
- Straight pull emergency shear release
- Increases pump efficiency
- Improves operating costs by reducing maintenance and down time caused by tubing or sucker rod wear
- Optional right hand set
- Parts interchangeable with other manufacturers

Specifications

	Casing			Anchor		
O.D.	Wt.	Min.	Max.	Size	Max. O.D.	Standard Box x PIN
4"	9.5 - 12.6	3.250	3.562	41	2.875	
4-1/2"	9.5 - 13.5	3.826	4.090	43A	3.750	2-3/8" EU 8 RND
5"	1.5 - 18	4.276	4.560	43B	4.000	
5-3/4"	11.5 - 15	4.408	4.778	43C	4.125	
5-1/2"	13 - 23	4.670	5.044	45A	4.500	
6"	18 - 23	5.240	5.424	45B	4.812	2-3/8" EU 8 RND or 2-7/8" 8 RND
6-5/8"	17 - 32	5.675	6.456	47A	5.500	
7"	20 - 38 17 - 20	5.675 6.413	6.456 7.125	47B 47B	5.500 6.250	
7-5/8"	20 - 39	6.413	7.125	47B	6.250	
6-5/8"	17 - 20	5.675	6.538	47 x 3.00	5.500	
7-5/8"	17 - 38	5.675	6.538	47 x 3.00	5.500	3-1/2" EU 8 RND
8-5/8"	24 - 49	7.250	8.093	49	7.000	
9-5/8"	32.3 - 47	8.681	9.001	51	8.000	
10-3/4"	32.75 - 65.7	9.560	10.192	53	8.656	

Note: Additional sizes available on request.